



2.4GHz Flex PCB Slot Antenna

Description

Occupying approximately one-third of a penny and implemented in ultra-thin 0.2mm flex PCB technology, BHWR250F is a complete, self-contained half-wavelength miniature slot antenna engineered for 2.4GHz embedded applications with the most stringent space limitations. BHWR250F can be simply connected to the RF port of any 2.4GHz systems using standard IPX/UFL cable assembly, without the need for any additional ground plane or impedance matching. The foldable, patent-pending design overcame significantly the VSWR sensitivity typical of electrically small antennas (ESAs), and provides reliable, high efficiency radiation for a vast range of wireless solutions such as Bluetooth audio, wearable, medical, electronic shelf label (ESL) and other IoT devices, as well as Wi-Fi, in the 2.4-2.5GHz frequency band.


Key Features

- Foldable Flex PCB Design
- Miniature Size: 5x20x0.2mm
- 2.4-2.5GHz Operation Frequency Range
- VSWR < 2:1 over 2.4-2.5GHz
- High Efficiency: TBD
- Stable VSWR over Cable Assemblies
- No Need for Ground Plane for Operation


Key Applications

- Bluetooth Embedded Solutions
- Bluetooth LE Audio/Auracast
- Wi-Fi 3/4/5/6/6E/7
- ZigBee/Thread/Matter IoT Devices
- Generic 2.4GHz Radio Designs
- FPC / LDS Antenna Alternatives

Product Information

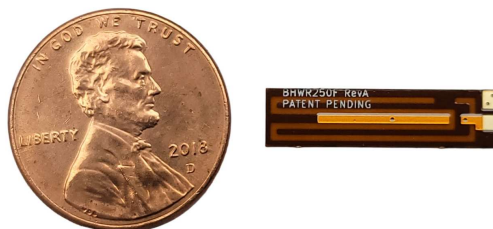

5x20x0.2mm Flex PCBA for IPX/UFL Cable Assembly




2.4GHz Flex PCB Slot Antenna

Electrical and Mechanical Specifications*

Parameter	Condition	Specification			Unit
		Min.	Typ.	Max.	
Operating Frequency		2.4		2.5	GHz
Gain			TBD		dBi
Radiation Efficiency			TBD		%
Input VSWR	Typical Cable & PCB Assembly		2:1	3:1	
Height	H		20		mm
Width	W		5		mm
Thickness	T		0.2		mm


Typical Input VSWR

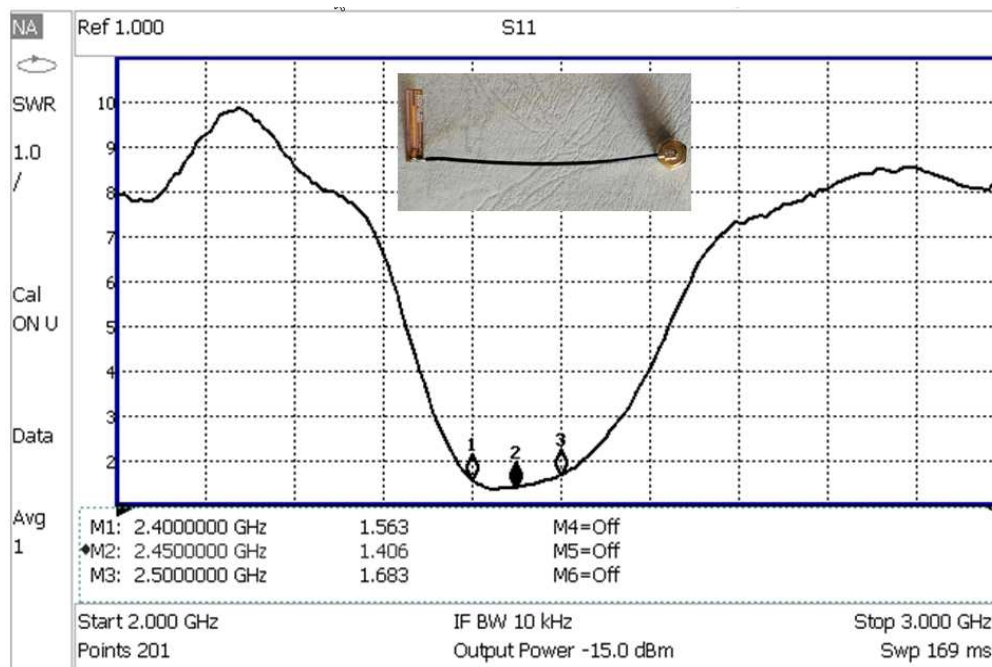


Typical measured standalone VSWR with 3-inch long IPX cable and IPX-to-SMA adapter



2.4GHz Flex PCB Slot Antenna

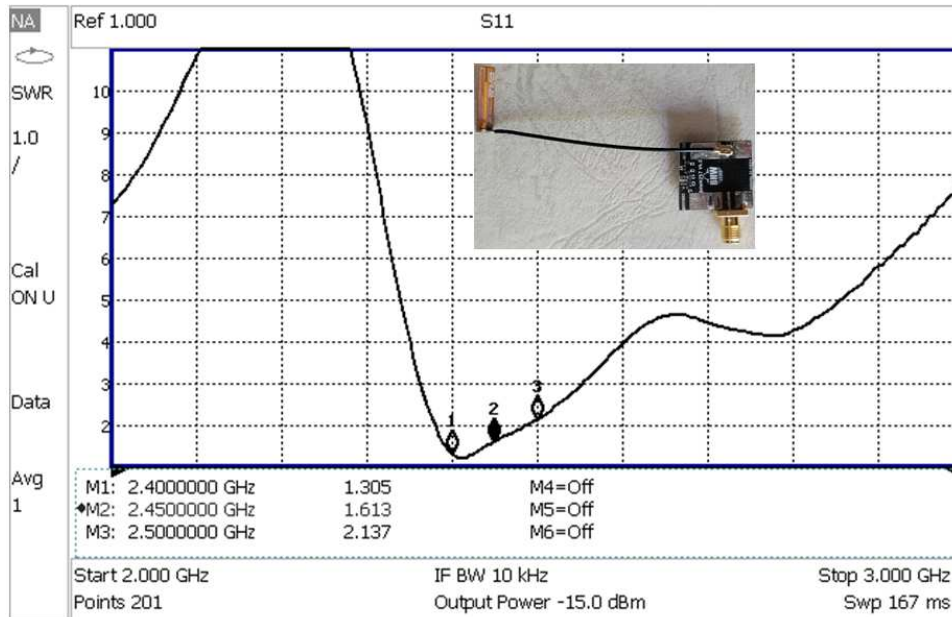

Typical measured VSWR when connected to a 2x2cm PCB via an IPX socket

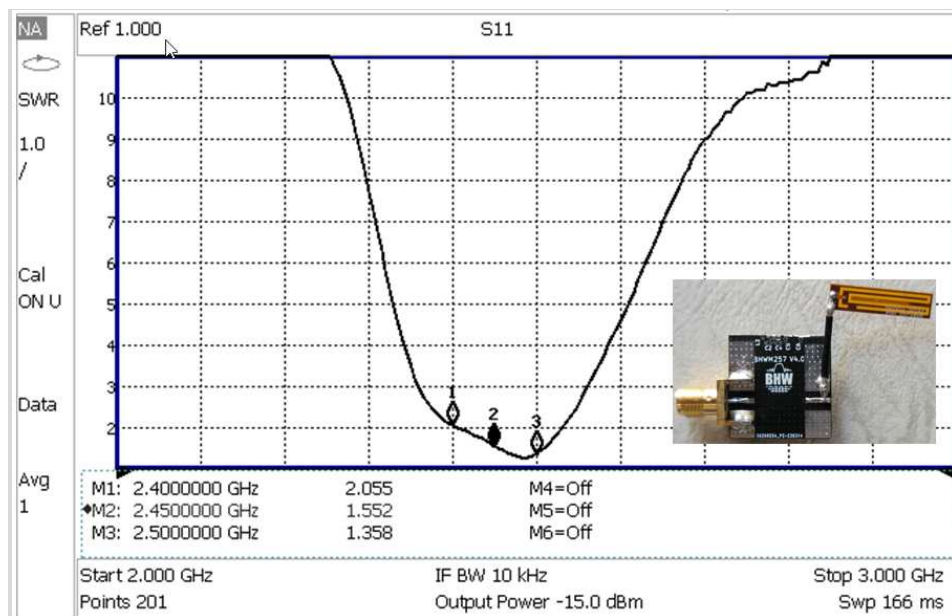


Typical measured VSWR when soldered directly to a 2x2cm PCB with a short IPX cable



2.4GHz Flex PCB Slot Antenna

Mechanical Drawings

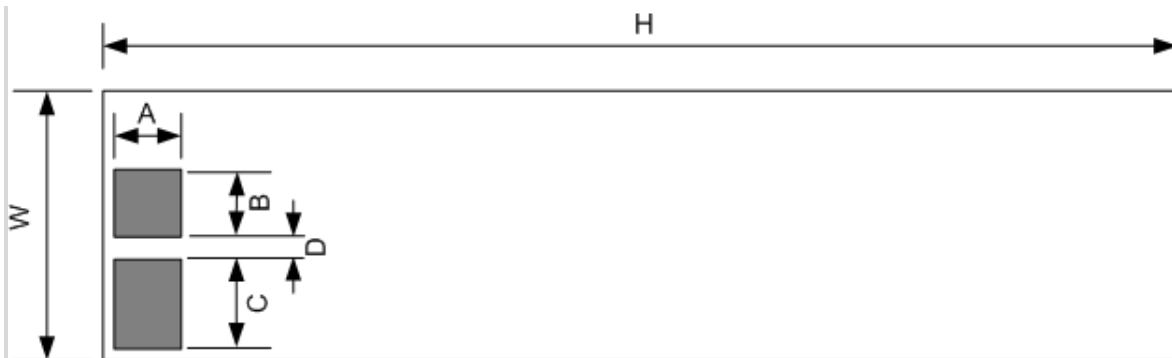

Symbol	Min. (mm)	Typ. (mm)	Max. (mm)
A	1.2	1.3	1.4
B	1.2	1.3	1.4
C	1.5	1.6	1.7
D	0.5	0.6	0.7
H	19.9	20	20.1
W	4.9	5	5.1

Note: Grey area is solder mask opening for IPX/UFL cable assembly.